


MODEL / MODELO	PRIME POWER	ENGINE MOTOR	ALTERNATOR	FUEL TANK (LIT)	WEIGHT (KG)
GSA65D	61.0 KVA	F6L912	UC1224E	240	954

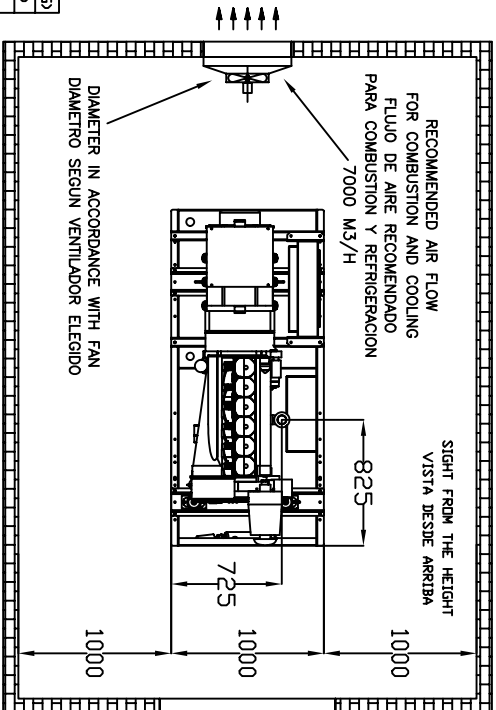

COOLING AIR INTAKE
ENTRADA DE AIRE

MODEL / MODELO	AIR FLOW/CAUDALES DE AIRE (M3/H)			FUEL CONSUMPTION/ CONSUMO DE COMBUSTIBLE (L/H)		RECOMMENDED AIR FLOW FOR COMBUSTION AND COOLING FLUID DE AIRE RECOMENDADO PARA COMBUSTION Y REFRIGERACION (M3/H)
	COMBUSTION	COOLING AIR	EXHAUST GASES	75% LOAD	100% LOAD	
GSA65D	216	3650	527	10.5	14.0	7000

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK SURFACE OF COOLING AIR INTAKE LIDERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LIDERS

NOTA: EL GENERADOR DEBE SITUARSE CON, AL MENOS, UN METRO LIBRE ALREDEDOR PARA TRABAJOS DE MANTENIMIENTO LA SUPERFICIE DE REJILLA DE REFRIGERACION DE ENTRADA DEBE SER, AL MENOS, DOS VECES LA SUPERFICIE DE LA REJILLA DE SALIDA DE AIRE

* IF IN DOUBT-ASK DO NOT SCALE / EN CASO DE DUDA-PREGUNTAR NO ESCALAR
* RECOMMENDED INSTALLATION DIMENSIONS FOR STANDARD CONFIGURATION / DIMENSIONES DE INSTALACION RECOMENDADAS PARA CONFIGURACION ESTANDAR
* THE PRODUCER RESERVES THE RIGHT OF MODIFYING THE DIMENSIONS REPRESENTED IN THIS PLANE WITHOUT PRIOR NOTICE
* EL FABRICANTE SE RESERVA EL DERECHO DE MODIFICAR LAS DIMENSIONES REPRESENTADAS EN ESTE PLANO SIN PREVIO AVISO

2004	DATE	NAME
Drawn	JGM	
Checked	JJM	
Examined		



RECOMMENDED INSTALLATION DIMENSIONS

STANDARD GENSET

GSA65D - 1.500 RPM

№ PIGSA65D_000

Replaced by: