
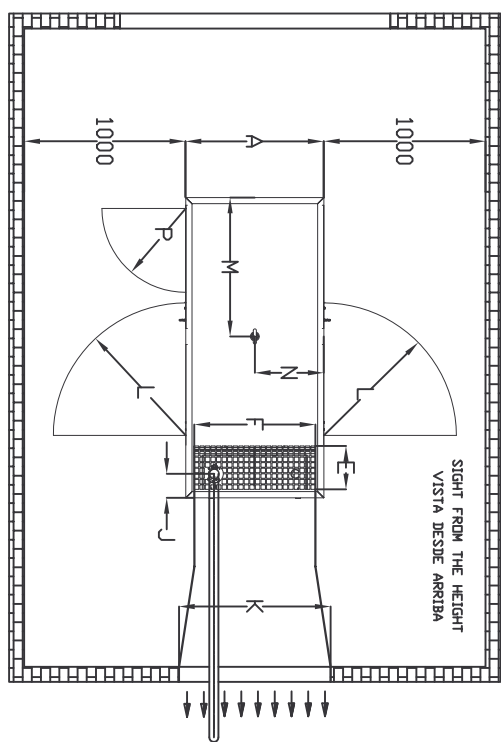


A (mm)	920	GSL30D	GSL42D
B (mm)	1262		
B1 (mm)	1132		
C (mm)	2000		
C1 (mm)	960		
D (mm)	200		
D1 (mm)	300		
E (mm)	290		
F (mm)	807		
G (mm)	370		
H (mm)	65		
I (mm)	730		
J (mm)	160		
K (mm)	1010		
L (mm)	875		
M (mm)	925		
N (mm)	460		
P (mm)	550		



NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

NOTA: EL GENERADOR DEBE SITUARSE CON, AL MENOS, UN METRO LIBRE ALREDEDOR PARA TRABAJOS DE MANTENIMIENTO LA SUPERFICIE DE REJILLA DE REFRIGERACION DE ENTRADA DEBE SER, AL MENOS, DOS VECES LA SUPERFICIE DE LA REJILLA DE SALIDA DE AIRE

MODEL / MODELO	PRIME POWER	ENGINE	ALTERNATOR	FUEL TANK (LIT)	WEIGHT (KG)
GSL30D	POTENCIA	MOTOR	ALTERNADOR	DEPOSITO DE COMBUSTIBLE	PESO (KG)
GSL42D	39.3	BF4M 2011	BCI 184J	78	952
					1024

MODEL / MODELO	AIR FLOW/CAUDALES DE AIRE (M3/H)	COMBUSTION AIRE DE REFRIGERACION	EXHAUST GASES GASES DE ESCAPE	FUEL CONSUMPTION/ CONSUMO DE COMBUSTIBLE (L/H)	75% LOAD	100% LOAD
GSL30D	117	1.800	314	5,3	7,1	7,1
GSL42D	151	2.370	432	7,1	9,4	9,4

* IF IN DOUBT-ASK, DO NOT SCALE / EN CASO DE DUDA-PREGUNTAR, NO ESCALAR
 * RECOMMENDED INSTALLATION DIMENSIONS FOR STANDARD CONFIGURATION / DIMENSIONES DE INSTALACION RECOMENDADAS PARA CONFIGURACION ESTANDAR
 * THE PRODUCER RESERVES THE RIGHT OF MODIFYING THE DIMENSIONS REPRESENTED IN THIS PLANE WITHOUT PRIOR NOTICE EL FABRICANTE SE RESERVA EL DERECHO DE MODIFICAR LAS DIMENSIONES REPRESENTADAS EN ESTE PLANO SIN PREVIO AVISO

2007	DATE	NAME	RECOMMENDED INSTALLATION DIMENSIONS SOUNDPROOF GENSET	PRAMAC POWER ENGINEERING
Drawn		JUG		
Checked				
Exhausted				

RECOMMENDED INSTALLATION DIMENSIONS
SOUNDPROOF GENSET

No P16SL30D-42D 500
Replaced by

GSL30D-42D - 1500 RPM