


	GSV195D	GSV220D
A (mm)	1240	1240
B (mm)	1844	1844
B1 (mm)	1232	1232
C (mm)	3400	3400
C1 (mm)	1650	1650
D (mm)	300	300
E (mm)	655	655
F (mm)	1140	1140
G (mm)	1023	1023
H (mm)	160	160
I (mm)	1011	1011
J (mm)	245	245
K (mm)	1385	1385
L (mm)	915	915
M (mm)	729	729
N (mm)	1445	1445
O (mm)	625	625
P (mm)	474	474

MODEL / MODELO	PRIME POWER POTENCIA	ENGINE MOTOR	ALTERNATOR ALTERNADOR	FUEL TANK (LIT) DEPÓSITO DE COMBUSTIBLE	WEIGHT (KG) PESO (KG)
GSV195D	207.65	BF6M1013CP02	UC0274G	340	2700
GSV220D	207.65	BF6M1013CP03	UC0274H	340	2750

MODEL / MODELO	AIR FLOW / CAUDALES DE AIRE (M ³ /H)	COMBUSTION / COMBUSTION	EXHAUST GASES DE ESCAPE	FUEL CONSUMPTION / CONSUMO DE COMBUSTIBLE (L/H)
GSV195D	684	11160	1956	32.9
GSV220D	744	11160	2194	36.6

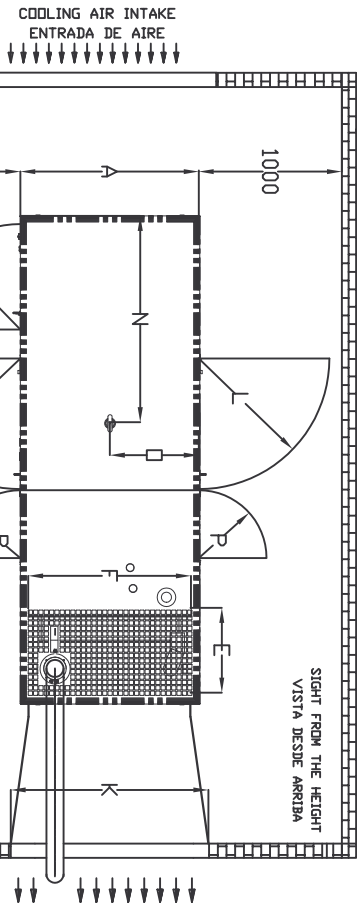

NOTE: GENERATING SET MUST BE LOCATED WITH, AT LEAST, ONE METER FREE SPACE AROUND FOR MAINTENANCE WORK SURFACE OF COOLING AIR INTAKE LOUVERS MUST BE, AT LEAST, TWICE SURFACE OF COOLING AIR EXHAUST LOUVERS

NOTA: EL GENERADOR DEBE SITUARSE CON, AL MENOS, UN METRO LIBRE ALREDEDOR PARA TRABAJOS DE MANTENIMIENTO LA SUPERFICIE DE REJILLA DE REFRIGERACION DE ENTRADA DEBE SER, AL MENOS, DOS VECES LA SUPERFICIE DE LA REJILLA DE SALIDA DE AIRE

* IF IN DOUBT-ASK, DO NOT SCALE / EN CASO DE DUDA-PREGUNTAR, NO ESCALAR
 * RECOMMENDED INSTALLATION DIMENSIONS FOR STANDARD CONFIGURATION / DIMENSIONES DE INSTALACION RECOMENDADAS PARA CONFIGURACION ESTANDAR
 * THE PRODUCER RESERVES THE RIGHT OF MODIFYING THE DIMENSIONS REPRESENTED IN THIS PLANE WITHOUT PRIOR NOTICE EL FABRICANTE SE RESERVA EL DERECHO DE MODIFICAR LAS DIMENSIONES REPRESENTADAS EN ESTE PLANO SIN PREVIO AVISO

2008	DATE	NAME	
Drawn	AMS		
Checked	08-05-08		
Exhausted			
SCALE			
RECOMMENDED INSTALLATION DIMENSIONS			
SOUNDPROOF GENSET			
No P/GSV195-220D_500			
Replaced by			
GWS195 - 220 D 1500 RPM			